

## Yuvo Tech+ Specifications

Model	Mahindra <b>YUVO TECH+</b> 265DI	Mahindra <b>YUVO TECH+</b> 275DI	Mahindra <b>YUVO TECH+</b> 405DI	Mahindra <b>YUVO TECH+</b> 475DIV1	Mahindra <b>YUVO TECH+</b> 475DI	Mahindra <b>YUVO TECH+</b> 575DI	Mahindra <b>YUVO TECH+</b> 585DI
Number of cylinders	3	3	3	3	4	4	4
Engine Torque (Nm)	146	153	180	201	202	205	215
Max PTO Power kW (HP)	22.2(29.7)	25 (33.5)	26.5 (35.5)	28.7 (38.5)	30.2 (40.5)	32.1 (43.1)	33.9 (45.4)
Rated RPM (r/min)	2000	2100	2000	2000	2000	2000	2100
Steering	Power Steering	Power Steering	Power Steering	Power Steering	Power Steering	Power Steering	Power Steering
Transmission	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh
Ground Speed (km/h) (F & R)	F 1.46 - 30.63 R 1.96 - 10.64	F 1.40 - 30.67 R 1.88 - 10.64	F 1.46 - 30.63 R 1.96 - 10.63	F 1.46 - 30.63 R 1.96 - 10.63	F 1.46 - 30.63 R 1.96 - 10.63	F 1.53 - 32.14 R 2.05 - 11.15	F 1.47 - 32.17 R 1.97 - 11.16
Number of gears	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R
Clutch	Single	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual
Hydraulic Pump Flow @ Rated (l/min)	29	30	29	29	29	29	30
Hydraulics lifting capacity(kg)	2000*	2000*	2000*	2000*	2000*	2000*	2000*
Front tyre	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	191 x 407 mm (7.5 x 16)	191 x 407 mm (7.5 x 16)
Rear tyre	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	379 x 711 mm (14.9 x 28)	379 x 711 mm (14.9 x 28)

\* Features may vary from model to model. The accessories and implements shown are not a part of the tractor. Specifications may change from time to time. With weight lifting capacity adjustment.

**Available options** 2WD | 4WD With High Lug Tyres | SLIPTO | Auxiliary Valve

**Factory fitment available** Tipping Trailer Pipe With Qdc Coupler | Front Bumper | Rear Tow Hook

### MAHINDRA TRACTORS

Mahindra & Mahindra Ltd., Farm Equipment Sector, Farm Division, AFS Headquarters, Mahindra Towers, 1st Floor, Akurli Road, Kandivali (E), Mumbai - 400101, India. Tel: 28849588, Fax: 28465813.

Toll Free No: 1800 2100 700 | <https://www.mahindractor.com> | YouTube: <https://www.youtube.com/mahindractorofficial>

Facebook: <https://www.facebook.com/MahindraTractorsIndia> | Instagram: <https://www.instagram.com/mahindractorofficial>

Twitter: <https://twitter.com/TractorMahindra>

mahindra<sup>Rise</sup>

# Mahindra Yuvo Tech+ Now with more + points

**mahindra**  
**TRACTORS**  
TOUGH HARDUM



(With adjustment)

**2000\* kg**  
Lifting Capacity

**Stabilizer Bar**  
For Adjustment Of  
Heavy Equipment In  
Muddy Conditions  
(Available in 475, 575, 585)

**Longer  
Top Link**


**Water  
Separator**  
Increases  
Engine Life

**DIGI SENSE 4G**  
Get information  
about your tractor  
at all times

No. 1 In Warranty  
★★★★★  
**6 YEARS**  
WARRANTY  
\*CONDITIONS APPLY



# A tractor that does wonders both inside and outside the field with Multi Speed PTO (MSPTO)

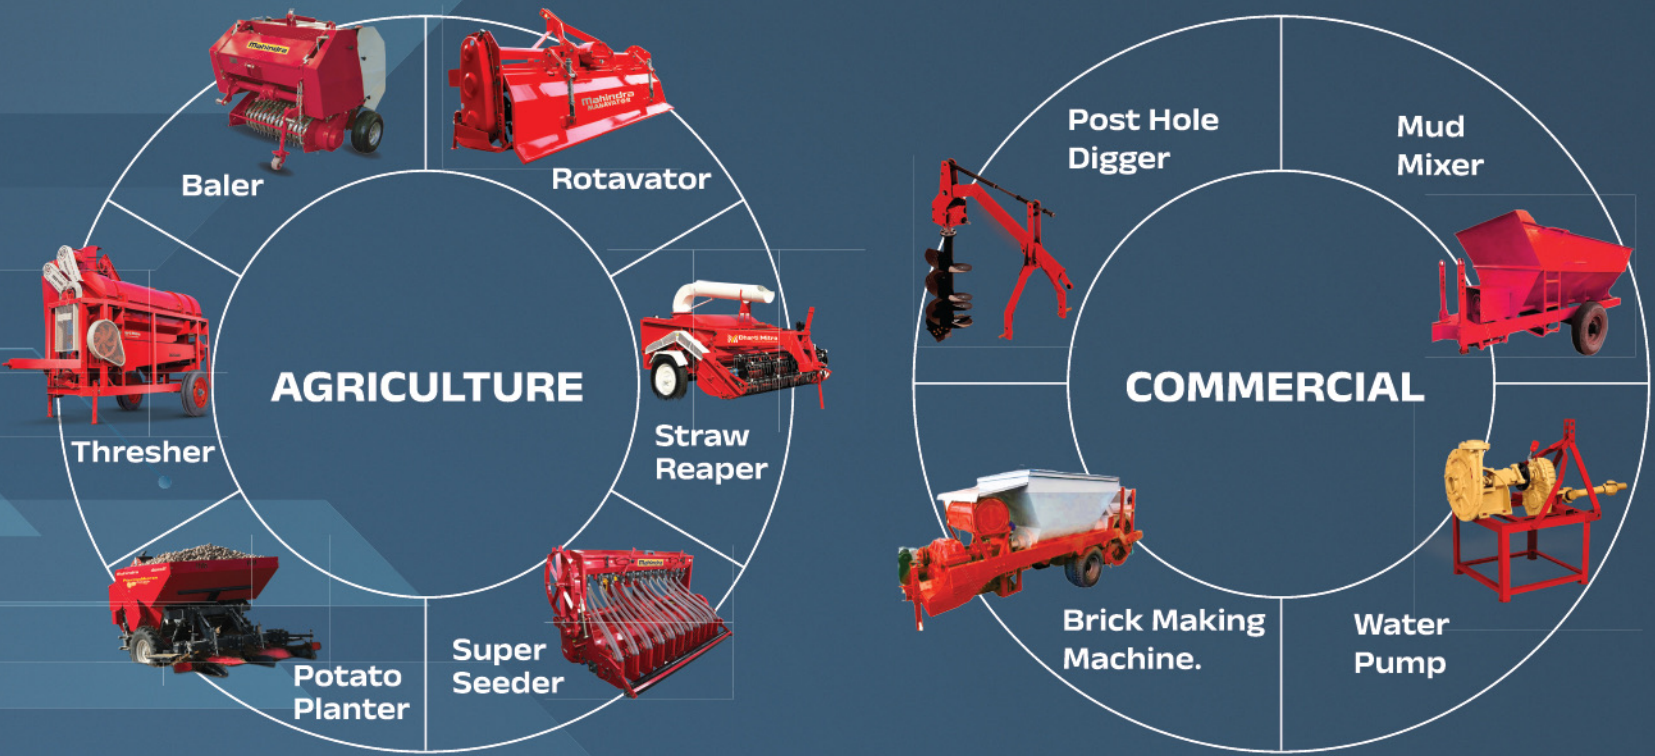


CLUTCH	NEW MSPTO OFFERING	Yuvo Tech+ Range						
		265	275	405	475 V1	475	575	585
SINGLE	6 Speeds: 540 and more 1 reverse and 4 forward speeds	✓	✓	✓	✓	✓	✓	✓
	6 Speeds: 540 and more 1 reverse and 4 forward speeds		✓	✓	✓	✓	✓	
DUAL	12 speeds: 540, 540E and more 2 reverse and 8 forward speeds	✓	✓	✓	✓	✓	✓	✓

## Now With More Points



### Digisense

- Farmer's third eye
- Get information about your tractor at all times



### MSPTO -

First time in this category – with 12 speed and 6 speed option

- 540 & Reverse
- 540, 540E & Reverse

### EQL Button

- Easily raise or lower the implement



(Available in 575, 585)

### Higher Ground Clearance in 4WD

- Increases productivity on any type of soil



### Water separator

- Increases the life of fuel Pump

### 2000\*Kg Hydraulics

**lifting capacity** (with adjustment)

- Lifts heavy implements with ease



### Stabilizer Bar

- For adjustment of heavy equipment in muddy conditions

### The Longer Length Of The Top Link

- Should Match The Lower Link Perfectly.